



**PRODUCT  
CATALOG**





# TABLE OF CONTENTS

---

About Us		2
----------	--	---

---

Explaining Imbalance		3
----------------------	--	---

---

Clip-On Wheel Weights	Lead	5
	Global Steel	6
	Heavy-Duty Lead	7

---

Installation Instructions		8
---------------------------	--	---

---

Adhesive Wheel Weights	Lead	10
	Steel	11

---

Snap-In Tire Valves		12-13
---------------------	--	-------

---

Accessories & Tools		14-15
---------------------	--	-------

---

Complete Part Number Reference		16-19
--------------------------------	--	-------

# ABOUT US



## Gladly serving our customers for more than 80 years

The Perfect Equipment brand has been delivering wheel weights to customers since 1939 - longer than any other brand in the business. Founded by William P. Smissen only a few short years after the original patent for the clip-on wheel weight was issued in 1932, Perfect Equipment has been on the forefront of technology ever since. As we move forward into the next generation, we will continue our tradition of innovation and quality, and just as our tagline states, we are 'balancing the future.'

## A brand with global reach

### Providing our customers the highest capacity available

Perfect Equipment is a brand of the WEGMANN automotive family of brands. WEGMANN automotive has a long history of success and features companies and brands all over the world. With fully owned and operated manufacturing, distribution and sales facilities strategically located worldwide, WEGMANN automotive is able to provide a supply chain advantage that no other wheel balance weight manufacturer can match.



ISO/TS **19649**

ISO **14001**



## Committed to excellence

We are proud to manufacture our products in certified facilities, utilizing our overall expertise to deliver high quality products to OEMs and the aftermarket.

### Some of our achievements

- ISO/TS-19649 Quality Systems Certified
- ISO-14001 Environmental Systems Certified
- Ford Q1 Certified Facility



## Customer service focused

One of our top priorities is to continually provide our customers with the best and fastest customer service available. Regardless of your question or issue, give us a call at our SERVICE FIRST LINE and you will immediately speak directly with a representative that can help you. Dial us today and see for yourself!

**SERVICE FIRST LINE**  
**1-888-215-4575**  
CONTACT CUSTOMER SERVICE DIRECT


## What is wheel assembly imbalance?

When made, wheels and tires inherently feature a heavy spot, or an imbalance. There are two types of imbalance: static imbalance and dynamic imbalance. Static imbalance is caused by a heavy-spot located on the circumference of an assembly and can cause wheel tramp, or a severe bouncing of the assembly when in motion. Dynamic imbalance is caused by a heavy-spot outside of the side-centerline of an assembly and can cause wheel shimmy, or a severe side-to-side staggering of the assembly when in motion.

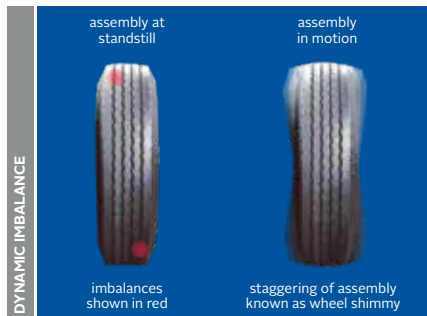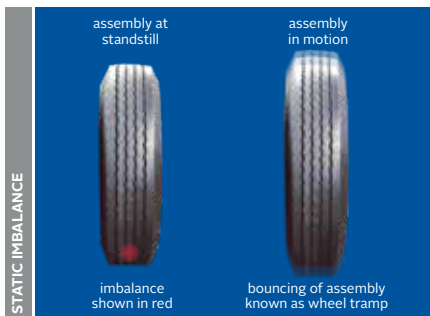


## How do you correct an imbalance?

By placing a clip-on or an adhesive wheel balance weight opposite the assemblies' heavy spot(s), the wheel assembly can now roll true.

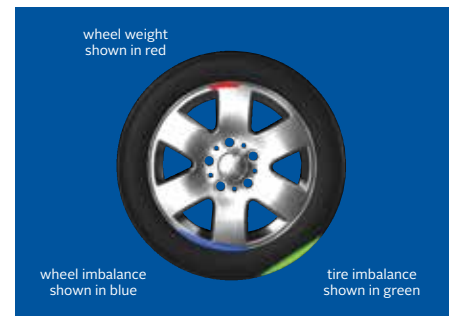

## 6 methods of balancing passenger car rims

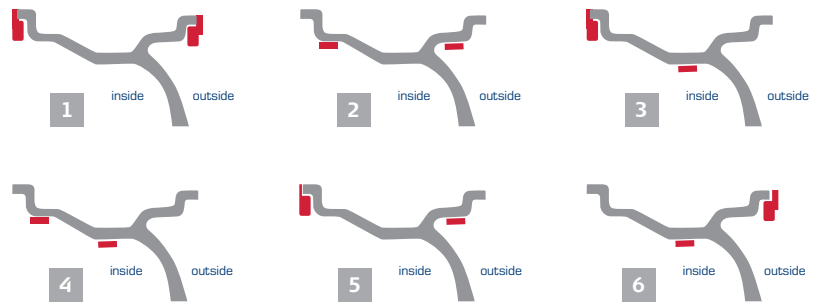

Introducing

# WWAPP™

wheel weight app

by WEGMANN®  
automotive

The wheel weight app (WWAPP™) was created to educate tire technicians and industry affiliates about proper wheel weight installation, help ensure proper fitment on wheels by providing correct information and make the reordering process more efficient.

Visit [wheelweightapp.com](http://wheelweightapp.com) to learn more and download





# CLIP-ON WEIGHTS



# STEEL



## PFE-Series

**Fits** Standard-width rim flange thickness passenger car steel wheels with 13"-17" wheel size.

**Available Sizes** 0.25 oz. - 2.50 oz.

- For Steel Wheels
- Ounces Only
- 5-Year Coating



## AWFE-Series

**Fits** Many brands like Acura, Buick, Chevrolet, Chrysler, Dodge, Infiniti, Isuzu, Lexus, Oldsmobile & Pontiac

**Available Sizes** 0.25 oz. - 2.50 oz.

- For Alloy Wheels
- Ounces Only
- 5-Year Coating



## MCFE-Series

**Fits** Many brands like Buick, Chevrolet, Chrysler, Dodge, Ford, Mazda, Oldsmobile, Pontiac & Saturn

**Available Sizes** 0.25 oz. - 2.50 oz.

- For Alloy Wheels
- Ounces Only
- 5-Year Coating



## IAWFE-Series

**Fits** Many brands like Audi, BMW, Cadillac, Jaguar, Kia, Nissan, Toyota, Volkswagen & Volvo

**Available Sizes** 5g - 60g

- For Alloy Wheels
- Grams Only
- 5-Year Coating



## FNFE-Series

**Fits** Many brands like Acura, Honda, Infiniti, Lexus, Nissan & Toyota

**Available Sizes** 10g - 60g

- For Alloy Wheels
- Grams Only
- 5-Year Coating



## TFE-Series

**Fits** Steel wheels with a thicker than standard rim flange and light-trucks with non-commercial alloy rims

**Available Sizes** 0.25 oz. - 2.50 oz.

- For Steel & Alloy Wheels
- Ounces Only
- Ounces Only

**NOTE:** Find individual part numbers for each product shown in this catalog in the part number reference.

# LEAD



## PS-Series

**Fits** Standard-width rim flange thickness passenger car steel wheels with 13"-17" wheel size.

**Available Sizes** 0.25 oz. - 6 oz.

- For Steel Wheels
- Ounces & Grams
- Coated & Uncoated



## AWN-Series

**Fits** Many brands like Acura, Buick, Chevrolet, Chrysler, Dodge, Infiniti, Isuzu, Lexus, Oldsmobile & Pontiac

**Available Sizes** 0.25 oz. - 3 oz.

- For Alloy Wheels
- Ounces & Grams
- Coated & Uncoated



## MCN-Series

**Fits** Many brands like Buick, Chevrolet, Chrysler, Dodge, Ford, Mazda, Oldsmobile, Pontiac & Saturn

**Available Sizes** 0.25 oz. - 4 oz.

- For Alloy Wheels
- Ounces & Grams
- Coated & Uncoated



## IAW-Series

**Fits** Many brands like Audi, BMW, Cadillac, Jaguar, Kia, Nissan, Toyota, Volkswagen & Volvo

**Available Sizes** 5g - 60g

- For Alloy Wheels
- Grams Only
- Coated Only



## FN-Series

**Fits** Many brands like Acura, Honda, Infiniti, Lexus, Nissan & Toyota

**Available Sizes** 5g - 80g

- For Alloy Wheels
- Ounces & Grams
- Coated & Uncoated



## TN-Series

**Fits** Steel wheels with a thicker than standard rim flange and light-trucks with non-commercial alloy rims

**Available Sizes** 0.25 oz. - 5 oz.

- For Steel & Alloy Wheels
- Ounces & Grams
- Coated Only

**NOTE:** Find individual part numbers for each product shown in this catalog in the part number reference.



# HEAVY-DUTY LEAD



## LT1-Series

**Fits** Medium-duty steel wheels and older light-duty trucks with thicker than standard rim flanges

**Available Sizes** 0.5 oz. - 6 oz.

- For Steel Wheels
- Ounces & Grams
- Uncoated only



## I7-Series

**Fits** Most heavy-duty & some older medium-duty trucks with steel wheels

**Available Sizes** 1 oz. - 16 oz.

- For Steel Wheels
- Ounces & Grams
- Uncoated only



## TAL-Series

**Fits** Most heavy-duty & some older medium-duty trucks with alloy wheels

**Available Sizes** 2 oz. - 8 oz.

- For Alloy Wheels
- Ounces Only
- Coated & Uncoated



## CT-Series

**Fits** HD tubeless alloy rims from Firestone, Accuride, Budd or Goodyear

**Available Sizes** 2 oz. - 16 oz.

- For Alloy Wheels
- Ounces & Grams
- Uncoated Only



## RC-Series

**Fits** HD alloy rims from Firestone, Accuride or Radial Commander

**Available Sizes** 2 oz. - 12 oz.

- For Alloy Wheels
- Ounces & Grams
- Uncoated Only

**NOTE:** Find individual part numbers for each product shown in this catalog in the part number reference.

# INSTALLATION INSTRUCTIONS

## Clip-on wheel weights



### 1. Select the correct application

Using a wheel weight application guide, select the correct application for the vehicle you are servicing. Check that the weight application is correct by testing the placement on the wheel flange.



### 2. Placing the weight on the rim

Place the wheel weight in the correct location of the imbalance. Prior to striking with the hammer, make sure that the top and the bottom of the clip are touching the rim flange. The body of the weight should not be touching the rim!



### 3. Installing the weight using a hammer

Once the wheel weight is properly aligned, strike the clip with a proper wheel weight installation hammer. Please note: striking the weight body could result in clip retention failure or weight movement.



### 4. Checking the weight fitment

After installing the weight, check to make sure that it is secured properly.

## Adhesive wheel weights



### 1. Cleaning and pre-treating the rim

Apply a suitable cleaning agent on the area where weight is to be applied. Wipe area clean and dry. Please note: Be sure to test the cleaning agent on a small area to ensure it will not damage the wheel's finish.



### 2. Select the correct adhesive weight size

Cut the adhesive weights or break them apart, depending on weight type, to obtain the correct amount of weight needed.



### 3. Applying the adhesive weight

Remove the tape backing and press the center of the weight exactly at the imbalance point. Please note: Do not touch the tape surface after peeling off the tape backing.



### 4. Securing the adhesive weight

Once the center of the weight is located at the imbalance point, press down on the full weight length working from the center to the left and right. Using firm hand pressure should be enough to secure the weight.

# ADHESIVE WEIGHTS





# STEEL QUIKSTIK®



## 200624ST QuikStik®

**Product Details** .25 oz. segments, 3 oz. per strip, 52 strips per box, 624 segments per box

**Product Size** Low profile, 0.1875" height, 1" width

-  Roll Available
-  .25 oz. Segments
-  CW Available
-  5-Year Coating



## 300360ST QuikStik®

**Product Details** .50 oz. segments, 6 oz. per strip, 30 strips per box, 360 segments per box

**Product Size** Standard profile, 0.3125" height, 1" width



-  Roll Available
-  .50 oz. Segments
-  CW Available
-  5-Year Coating



## 410090ST Adhesive

**Product Details** 1.00 oz. segments, 6 oz. per strip, 15 strips per box, 90 segments per box, nano coating

**Product Size** Low profile, 0.1875" height, 1.25" width



-  1.00 oz. Segments
-  5-Year Coating



## 310224ST Adhesive

**Product Details** 0.50 oz. segments, 4 oz. per strip, 28 strips per box, 224 segments per box, nano coating

**Product Size** Low profile, 0.1875" height, 0.75" width




-  .50 oz. Segments
-  5-Year Coating



## 200576FE Adhesive

**Product Details** 0.25 oz. segments, 3 oz. per strip, 48 strips per box, 576 segments per box, grey coating

**Product Size** Low profile, 0.1875" height, 0.75" width



-  Roll Available
-  .25 oz. Segments
-  3-Year Coating



## 300336FE Adhesive

**Product Details** 0.50 oz. segments, 6 oz. per strip, 28 strips per box, 336 segments per box, grey coating

**Product Size** Standard profile, 0.32" height, 0.787" width



-  .50 oz. Segments
-  3-Year Coating



## 200576FEBLK Adhesive

**Product Details** 0.25 oz. segments, 3 oz. per strip, 48 strips per box, 576 segments per box, black coating

**Product Size** Low profile, 0.1875" height, 0.75" width



-  .50 oz. Segments
-  3-Year Coating



## 300336FEBLK Adhesive

**Product Details** 0.50 oz. segments, 6 oz. per strip, 28 strips per box, 336 segments per box, black coating

**Product Size** Standard profile, 0.32" height, 0.787" width

-  .50 oz. Segments
-  3-Year Coating

**NOTE:** Find individual part numbers for each product shown in this catalog in the part number reference.



# LEAD QUIKSTIK®



## 100360 QuikStik®

**Product Details** .25 oz. segments, 3 oz. per strip, 30 strips per box, 360 segments per box

**Product Size** Standard profile, 0.2188" height, 0.50" width




-  .25 oz. Segments
-  Coated & Uncoated



## 200624 QuikStik®

**Product Details** .25 oz. segments, 3 oz. per strip, 52 strips per box, 624 segments per box

**Product Size** Low profile, 0.1563" height, 0.75" width




-  .25 oz. Segments
-  CW Available
-  Coated & Uncoated



## 300360 QuikStik®

**Product Details** .50 oz. segments, 6 oz. per strip, 30 strips per box, 360 segments per box

**Product Size** Standard profile, 0.2813" height, 0.75" width



-  .50 oz. Segments
-  CW Available
-  Coated & Uncoated



## CL6 QuikStik®

**Product Details** 1 oz. segments, 6 oz. per strip, 30 strips per box, 180 segments per box

**Product Size** Standard profile, 0.2813 height, 0.75" width



-  1 oz. Segments
-  Uncoated Only



## CL12 QuikStik®



**Product Details** 2 oz. segments, 12 oz. per strip, 8 strips per box, 48 segments per box

**Product Size** Standard profile, 0.3438" height, 1.25" width


-  2 oz. Segments
-  Uncoated Only


## COLD WEATHER ADHESIVE WEIGHTS


HOW IT WORKS

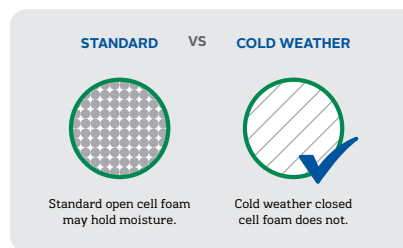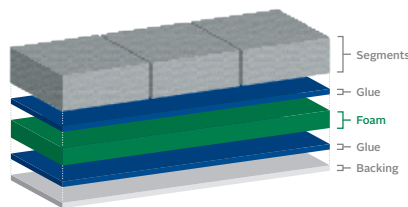

**Available Part Numbers** 200624CW, 300360CW, 200624STCW, 300360STCW

 Lead & Steel Available

 0.25 oz. & 0.50 oz. Segments Available

 Coated & Uncoated Available

**NOTE:** Find individual part numbers for each product shown in this catalog in the part number reference.


# SNAP-IN VALVES



FEATURES & BENEFITS

Knurled plastic dome or hex head metal valve cap with seal

Rubber injected molding process ensures a solid metal-to-rubber bonding process for a no-leak seal

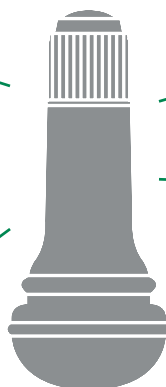

Spring-loaded, high-quality brass valve core

Creep resistant EPDM rubber mix provides durable & high-fracture toughness

Premium mold construction and electronically controlled processes ensure consistent tolerances



## Standard Valves for 0.453" Rim Holes

### TR412 Rubber & 412C Chrome

**Product Details** 100 valves per bag, 5 bags per case

**Product Size** 0.453" rim hole diameter, 0.875" length, 65PSI



### TR413 Rubber & 413C Chrome

**Product Details** 100 valves per bag, 5 bags per case

**Product Size** 0.453" rim hole diameter, 1.25" length, 65PSI



### TR414 Rubber & 414C Chrome

**Product Details** 100 valves per bag, 5 bags per case

**Product Size** 0.453" rim hole diameter, 1.50" length, 65PSI



### TR418 Rubber & 418C Chrome

**Product Details** 100 valves per bag, 5 bags per case

**Product Size** 0.453" rim hole diameter, 2.00" length, 65PSI



### TR423 Rubber

**Product Details** 100 valves per bag, 5 bags per case

**Product Size** 0.453" rim hole diameter, 2.50" length, 65PSI



## High Pressure Valves for 0.453" Rim Holes

### TR600HP

**Product Details** 100 valves per bag, 5 bags per case

**Product Size** 0.045" rim hole diameter, 1.27" length, 65PSI



## Standard Valves for 0.625" Rim Holes

### TR415

**Product Details** 100 valves per bag, 5 bags per case

**Product Size** 0.625" rim hole diameter, 1.25" length, 65PSI



### TR425

**Product Details** 100 valves per bag, 5 bags per case

**Product Size** 0.625" rim hole diameter, 2.00" length, 65PSI



## Snap-In Valve Install Lever

### VRT1

Plastic handle & Nickel plated metal



## Valve Core Screwdriver

### VCRT1

Plastic handle & Nickel plated metal VG5 head



**NOTE:** Find individual part numbers for each product shown in this catalog in the part number reference.

# ACCESSORIES & TOOLS



 **Perfect**  
EQUIPMENT

OUNCES	CONVERT TO	GRAMS
1.00	.....	10
1.25	.....	15
1.40	.....	20
1.50	.....	25
1.75	.....	30
2.00	.....	35
	.....	40
	.....	45
	.....	50
	.....	55

FIRST LINE  
3-215

FN

HN

P

TN

MC

## Product Catalog

Additional copies of this full-line catalog are available.

Part Number 18000




## OEM Alloy Clip-On Application Wall Chart

This wall chart provides clip type application data for OE alloy rims for passenger cars and light trucks.

Part Number 18027

Dimensions 22" W x 34" H

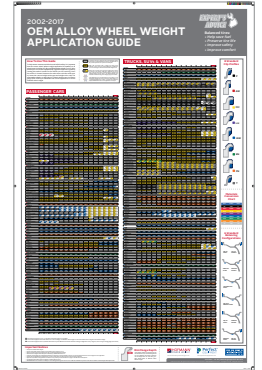

## OEM Alloy Clip-On Application Brochure

This brochure style guide provides clip type application data for all OE alloy rims for passenger cars and light trucks.

Part Number 18082



## Empty Rack Kits

Empty rack kits include everything as shown with the full kits except for the soft-head hammer and the wheel weights.

Part Numbers

CWW075E - Full-size assortment empty kit, 78 lbs.  
CWW155E - Table-top assortment empty kit, 35 lbs.



## Rim Gauges

Rim gauges should be used when proper applications can not be found in the application guide.

Part Numbers

RGP1 - Passenger car & light truck  
RG2 - Medium & heavy-duty truck



RGP1



RG2

**NOTE:** Find individual part numbers for each product shown in this catalog in the part number reference.



## 25K Pliers

This light-duty wheel weight installation and removal tool is the industry standard for uncoated lead clip-on style wheel weights.

Part Number 25K



## 75K Alloy Hammer

Used for the installation of coated clip-on wheel weights.

Part Number 75K  
(75H - 5 qty replacement horns)  
(75P - 5 qty replacement faces)



## 50K & 50KE Pliers

This European designed clip-on wheel weight installation and removal tool features a "Clip Claw" crowbar, punch-designed handles, and a heavier hammer head.

Part Number 50K & 50KE



## 95K Alloy Hammer

Specifically designed to install TAL clip-on wheel weights.

Part Number 95K



## 71K Pliers

Known as "The Protector," this wheel weight installation and removal tool is to be used on coated clip-on wheel weights.

Part Number 71K  
(5 qty replacement faces - 71P)



## 105K Alloy Hammer

The 105K is the preferred non-lead clip-on installation and removal tool.

Part Number 105K  
(105HSD - 1 qty standard replacement horn)  
(105HST - 1 qty short replacement horn)



## PT7 Pliers

Primarily used for large truck steel clip-on wheel weights. The "Clip Claw" design is ideal for removing weights that have minimum tire/wheel flange clearance.

Part Number PT7



## QSS1 QuikStik® Adhesive Scraper

This adhesive wheel weight removal tool is the industry standard.

Part Number QSS1



## TR10 Removal Tool

This heavy-duty, hardened steel removal tool even makes taking off the toughest weights easy.

Part Number TR10




## Roll Accessories

QS1000 SegmentLock Bar: magnetized bar to help prevent weights from falling back in the roll box

QS2000 Single-head steel floor stand

QS3000 Dual-head steel floor stand



**NOTE:** Please refer to application guide or use a rim gauge to verify all specific applications.

# PART NUMBER REFERENCE



## Lead Clip-On AS SEEN ON PAGES 8-9

### Uncoated

Part No.	Size	Pcs/box
■ P025	0.25 oz.	50
P050	0.50 oz.	50
P075	0.75 oz.	50
P100	1.00 oz.	50
P125	1.25 oz.	50
P150	1.50 oz.	50
P175	1.75 oz.	50
P200	2.00 oz.	50
P225	2.25 oz.	50
P250	2.50 oz.	50
P275	2.75 oz.	50
P300	3.00 oz.	50
P325	3.25 oz.	25
P350	3.50 oz.	25
P375	3.75 oz.	25
P400	4.00 oz.	25
P450	4.50 oz.	25
P500	5.00 oz.	25
P550	5.50 oz.	25
P600	6.00 oz.	25
■ AW025	0.25 oz.	50
AW050	0.50 oz.	50
AW075	0.75 oz.	50
AW100	1.00 oz.	50
AW125	1.25 oz.	50
AW150	1.50 oz.	50
AW175	1.75 oz.	50
AW200	2.00 oz.	50
AW225	2.25 oz.	50
AW250	2.50 oz.	50
AW275	2.75 oz.	50
AW300	3.00 oz.	50
■ MC025	0.25 oz.	50
MC050	0.50 oz.	50
MC075	0.75 oz.	50
MC100	1.00 oz.	50
MC125	1.25 oz.	50
MC150	1.50 oz.	50
MC175	1.75 oz.	50
MC200	2.00 oz.	50
MC225	2.25 oz.	50
MC250	2.50 oz.	50
MC275	2.75 oz.	50
MC300	3.00 oz.	50

### Coated

Part No.	Size	Pcs/box
■ P025S	0.25 oz.	25
P050S	0.50 oz.	25
P075S	0.75 oz.	25
P100S	1.00 oz.	25
P125S	1.25 oz.	25
P150S	1.50 oz.	25
P175S	1.75 oz.	25
P200S	2.00 oz.	25
P225S	2.25 oz.	25
P250S	2.50 oz.	25
P275S	2.75 oz.	25
P300S	3.00 oz.	25
P325S	3.25 oz.	25
P350S	3.50 oz.	25
P375S	3.75 oz.	25
P400S	4.00 oz.	25
P450S	4.50 oz.	25
P500S	5.00 oz.	25
P550S	5.50 oz.	25
P600S	6.00 oz.	25
■ AW025N	0.25 oz.	25
AW050N	0.50 oz.	25
AW075N	0.75 oz.	25
AW100N	1.00 oz.	25
AW125N	1.25 oz.	25
AW150N	1.50 oz.	25
AW175N	1.75 oz.	25
AW200N	2.00 oz.	25
AW225N	2.25 oz.	25
AW250N	2.50 oz.	25
AW275N	2.75 oz.	25
AW300N	3.00 oz.	25
■ MC025N	0.25 oz.	25
MC050N	0.50 oz.	25
MC075N	0.75 oz.	25
MC100N	1.00 oz.	25
MC125N	1.25 oz.	25
MC150N	1.50 oz.	25
MC175N	1.75 oz.	25
MC200N	2.00 oz.	25
MC225N	2.25 oz.	25
MC250N	2.50 oz.	25
MC275N	2.75 oz.	25
MC300N	3.00 oz.	25

Part No.	Size	Pcs/box
MC325N	3.25 oz.	25
MC350N	3.50 oz.	25
MC375N	3.75 oz.	25
MC400N	4.00 oz.	25
■ IAW005	5 g	25
IAW010	10 g	25
IAW015	15 g	25
IAW020	20 g	25
IAW025	25 g	25
IAW030	30 g	25
IAW035	35 g	25
IAW040	40 g	25
IAW045	45 g	25
IAW050	50 g	25
IAW055	55 g	25
IAW060	60 g	25
■ FNO05	5 g	25
FNO05S*	5 g	25
FNO75	7.5 g	25
FNO10	10 g	25
FNO125	12.5 g	25
FNO15	15 g	25
FNO175	17.5 g	25
FNO20	20 g	25
FNO225	22.5 g	25
FNO25	25 g	25
FNO275	27.5 g	25
FNO30	30 g	25
FNO325	32.5 g	25
FNO35	35 g	25
FNO375	37.5 g	25
FNO40	40 g	25
FNO45	45 g	25
FNO50	50 g	25
FNO55	55 g	25
FNO60	60 g	25
FNO65	65 g	25
FNO70	70 g	25
FNO75	75 g	25
FNO80	80 g	25
■ TO25N	0.25 oz.	25
TO50N	0.50 oz.	25
TO75N	0.75 oz.	25
T100N	1.00 oz.	25

Part No.	Size	Pcs/box
T125N	1.25 oz.	25
T150N	1.50 oz.	25
T175N	1.75 oz.	25
T200N	2.00 oz.	25
T225N	2.25 oz.	25
T250N	2.50 oz.	25
T275N	2.75 oz.	25
T300N	3.00 oz.	25
T325N	3.25 oz.	25
T350N	3.50 oz.	25
T375N	3.75 oz.	25
T400N	4.00 oz.	25
T450N	4.50 oz.	25
T500N	5.00 oz.	25

## Perfect Steel Clip-On AS SEEN ON PAGES 10-11

Part No.	Size	Pcs/box
■ P025FE	0.25 oz.	25
P050FE	0.50 oz.	25
P075FE	0.75 oz.	25
P100FE	1.00 oz.	25
P125FE	1.25 oz.	25
P150FE	1.50 oz.	25
P175FE	1.75 oz.	25
P200FE	2.00 oz.	25
P225FE	2.25 oz.	25
P250FE	2.50 oz.	25
■ AW025FE	0.25 oz.	25
AW050FE	0.50 oz.	25
AW075FE	0.75 oz.	25
AW100FE	1.00 oz.	25
AW125FE	1.25 oz.	25
AW150FE	1.50 oz.	25

AW175FE	1.75 oz.	25
AW200FE	2.00 oz.	25
AW225FE	2.25 oz.	25
AW250FE	2.50 oz.	25

Part No.	Size	Pcs/box
■ MC025FE	0.25 oz.	25
MC050FE	0.50 oz.	25
MC075FE	0.75 oz.	25
MC100FE	1.00 oz.	25
MC125FE	1.25 oz.	25
MC150FE	1.50 oz.	25
MC175FE	1.75 oz.	25
MC200FE	2.00 oz.	25
MC225FE	2.25 oz.	25
MC250FE	2.50 oz.	25
■ IAW010FE	10 g	25

IAW015FE	15 g	25
IAW020FE	20 g	25
IAW025FE	25 g	25
IAW030FE	30 g	25
IAW035FE	35 g	25
IAW040FE	40 g	25
IAW045FE	45 g	25
IAW050FE	50 g	25
IAW055FE	55 g	25
IAW060FE	60 g	25

Part No.	Size	Pcs/box
■ FNO10FE	10 g	25
FNO15FE	15 g	25
FNO20FE	20 g	25
FNO25FE	25 g	25
FNO30FE	30 g	25
FNO35FE	35 g	25

FNO40FE	40 g	25
FNO45FE	45 g	25
FNO50FE	50 g	25
FNO55FE	55 g	25
FNO60FE	60 g	25
■ T025FE	0.25 oz.	25
T050FE	0.50 oz.	25
T075FE	0.75 oz.	25
T100FE	1.00 oz.	25
T125FE	1.25 oz.	25
T150FE	1.50 oz.	25
T175FE	1.75 oz.	25
T200FE	2.00 oz.	25
T225FE	2.25 oz.	25
T250FE	2.50 oz.	25

## Heavy-Duty Lead Clip-On AS SEEN ON PAGES 14-15

Part No.	Size	Pcs/box
RCO20	2.00 oz.	25
RCO30	3.00 oz.	25
RCO40	4.00 oz.	25
RCO60	6.00 oz.	25
RCO80	8.00 oz.	25
RC100	10.00 oz.	20
RC120	12.00 oz.	20
CTO20	2.00 oz.	25
CTO30	3.00 oz.	25
CTO40	4.00 oz.	25
CTO60	6.00 oz.	25
CTO80	8.00 oz.	25
CT100	10.00 oz.	20

CT120	12.00 oz.	20
CT140	14.00 oz.	10

Part No.	Size	Pcs/box
CT160	16.00 oz.	10
TALO20	2.00 oz.	25
TALO30	3.00 oz.	25
TALO40	4.00 oz.	25
TALO60	6.00 oz.	25
TALO80	8.00 oz.	25
TALO30U	3.00 oz.	25
TALO40U	4.00 oz.	25
TALO60U	6.00 oz.	25
TALO80U	8.00 oz.	25

LT1005	0.50 oz.	25
LT1010	1.00 oz.	25
LT1015	1.50 oz.	25
LT1020	2.00 oz.	25
LT1025	2.50 oz.	25

Part No.	Size	Pcs/box
LT1030	3.00 oz.	25
LT1035	3.50 oz.	25
LT1040	4.00 oz.	25
LT1045	4.50 oz.	25
LT1050	5.00 oz.	25
LT1060	6.00 oz.	25
I7010	1.00 oz.	25
I7015	1.50 oz.	25

I7020	2.00 oz.	25
I7025	2.50 oz.	25
I7030	3.00 oz.	25
I7035	3.50 oz.	25
I7040	4.00 oz.	25
I7050	5.00 oz.	25
I7060	6.00 oz.	25

Part No.	Size	Pcs/box
I7080	8.00 oz.	25
I7100	10.00 oz.	20
I7120	12.00 oz.	20
I7140	14.00 oz.	10
I7160	16.00 oz.	10

## Empty Rack Kits AS SEEN ON PAGE 16

Part No.	Size
CWW075E	Full-size assortment empty kit (includes rack stand, application guide, wall chart and two rim gauges)
CWW155E	Table-top assortment empty kit (includes rack stand, application guide, wall chart and two rim gauges)



## All Adhesives AS SEEN ON PAGES 17-21

Part No.	Material	Segment Size	Strip Size	Pcs/box
200624ST	Steel	0.25 oz.	3.00 oz.	52
200624STCW	Steel	0.25 oz.	3.00 oz.	52
200624STR	Steel	0.25 oz.	1,280 segments	20lb Roll
300360ST	Steel	0.50 oz.	6.00 oz.	30
300360STCW	Steel	0.50 oz.	6.00 oz.	30
300360STR	Steel	0.50 oz.	640 segments	20lb Roll
310224ST	Steel	0.50 oz.	4.00 oz.	28
410090ST	Steel	1.00 oz.	6.00 oz.	15
200576FE	Steel	0.25 oz.	3.00 oz.	48
200576FEBLK	Steel	0.25 oz.	3.00 oz.	48
200576FER	Steel	0.25 oz.	704 segments	11lb Roll
300336FE	Steel	0.50 oz.	6.00 oz.	28
300336FEBLK	Steel	0.50 oz.	6.00 oz.	28

Part No.	Material	Segment Size	Strip Size	Pcs/box
100360	Lead	0.25 oz.	3.00 oz.	30
100360S (coated)	Lead	0.25 oz.	3.00 oz.	30
100720	Lead	0.25 oz.	3.00 oz.	60
200624	Lead	0.25 oz.	3.00 oz.	52
200624N (coated)	Lead	0.25 oz.	3.00 oz.	52
200624S	Lead	0.25 oz.	3.00 oz.	48
200624CW	Lead	0.25 oz.	3.00 oz.	52
300360	Lead	0.50 oz.	6.00 oz.	30
300360CW	Lead	0.50 oz.	6.00 oz.	30
CL6	Lead	1.00 oz.	6.00 oz.	30
CL12	Lead	2.00 oz.	12.00 oz.	8

## Snap-In Tire Valves AS SEEN ON PAGES 23-26

Part No.	Rim Hole	Length	Pcs/bag	Bags/case
0401-0023-230	0.453"	0.875"	100	5
0401-0023-232	0.453"	0.875"	100	5
0401-0023-063	0.453"	1.25"	100	5
0401-0023-212	0.453"	1.25"	100	5
0401-0023-064	0.453"	1.50"	100	5
0401-0023-202	0.453"	1.50"	100	5

Part No.	Rim Hole	Length	Pcs/bag	Bags/case
0401-0023-027	0.625"	1.25"	100	5
0401-0023-065	0.453"	2.00"	100	5
0401-0023-308	0.453"	2.00"	100	5
0401-0023-309	0.453"	2.50"	100	5
0401-0023-310	0.625"	2.00"	100	5
0401-0023-200	0.453"	1.25"	100	5

## Accessories & Tools AS SEEN ON PAGES 27-30

Part No.	Description
25K	Wheel Weight Pliers
50K	Wheel Weight Pliers
50KE	Wheel Weight Pliers - Economy
71K	Wheel Weight Pliers w/ "Soft Head"
71P	Replacement "Soft Heads" (5) For 71K
75K	Wheel Weight Hammer w/ "Soft Head"
75P	Replacement "Soft Heads" (5) For 75K
75H	Replacement Removal Horns (5) for 75K & 105K
95K	TAL Dual Wheel Weight Hammer
PT7	Wheel Weight Pliers - Truck
105K	Non-Lead Wheel Weight Hammer

Part No.	Description
105HSD	Standard to Long Replacement Hook
105HST	Short Replacement Hook
QSS1	QuikStik® Adhesive Scraper
QS1000	SegmentLock Bar
QS2000	Steel Weight Roll Stand - Single Head
QS3000	Steel Weight Roll Stand - Dual Head
TR-10	Wheel Weight Removal Tool
RG2	Heavy-Duty Truck Rim Flange Gauge
RGP1	Passenger Car Rim Flange Gauge
18027	OE Alloy Application Wall Chart
18082	OE Alloy Application Guide
18000	Perfect Equipment Catalog





**US HEADQUARTERS:**

1715 Joe B. Jackson Parkway | Murfreesboro, TN 37127  
Service First Line: 1-888-215-4575

**US WEST COAST DISTRIBUTION:**

54 N. 45th Ave. Suite H | Phoenix, AZ 85043

[www.perfectequipment.com](http://www.perfectequipment.com)

**Perfect Equipment is a brand of**



**Form 18000** - Perfect Equipment Product Catalog  
All contents © copyright, WEGMANN automotive. All rights reserved.